





Frigg Series


Frigg-serien tilbyr en optimal visningsopplevelse med et perfekt 16:9-format. Den er konstruert for høy pålitelighet og holdbarhet, og tåler ekstreme miljøforhold uten å gå på kompromiss med ytelsen. Skjermen er enkel å installere og utmerker seg med et modulært design som gjør det raskt og enkelt å montere og demontere både moduler og strømboks. En robust og langvarig løsning – ideell for krevende bruksområder.

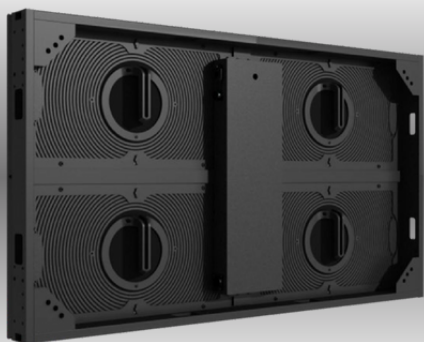

16:9-Forhold

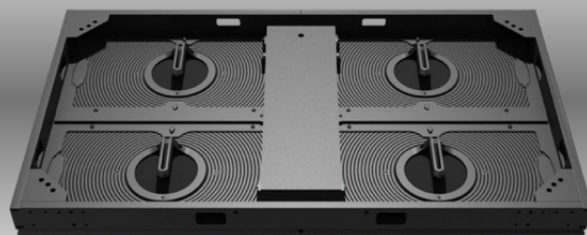

Tynn og lett: 11,5 kg per enhet

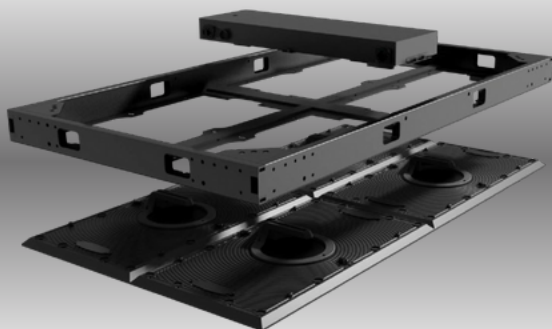

Fleksiblet design



Front & bak service



Frigg



Spesifikasjoner

Module Model	TL3	TL5	TL7
Pixel Pitch (mm)	3.75	5	7.5
LED Composition	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1
Module Size (mm)	480x270	480x270	480x270
Module Resolution (WxH)	128*72	96*54	64*36
Module Configuration (W x H)	2*2	2*2	2*2
Cabinet Dimension (mm)	960*540	960*540	960*540
Cabinet Resolution (WxH)	256*144	192*108	128*72
Net Weight/cabinet (kg/pc)	11.5	11.5	11.5
Serviceability	Front/Rear	Front/Rear	Front/Rear
Brightness (nits)	5000	5000	6000
Max Power consumption (w/m2)	660	660	660
Avg. Power consumption (w/m2)	230	230	230
Pixel Density (pixel/m2)	71,111	40,000	17,777
Material	Aluminum Alloy		
IP rating(Front/Rear)	IP65/IP54		
Contrast Ratio	5000:1		
Refresh Rate	3840		
Color Processing	14		
Viewing Angle (H/V)	160/160		
AC Working Voltage	100/240V-50/60Hz		
LED Lifetime Hours	100000		